MOBINOX

Stainless steel mobile housing for computer equipment
Designed to hold, organise and protect IT workstations or various configurations of labelling machinery

Characteristics:
• Mechanically welded assembly;
• Structure made from stainless steel 304 composed of four vertical uprights to adjust shelf heights;
• Connections: Two standard cable glands (7 to 13 mm) to feed cables.

Upper section:
• Curved support tube 30 mm diameter, to take (on option): a MONITOR MOUNT, a PISTOL MOUNT, or an IP 65 WATERPROOF LCD SCREEN ENCLOSURE;
• Stainless steel worktop designed for a keyboard and mouse;
• Handling: 1 front handle welded to the structure.

Lower section:
• Encased by 10 mm thick composite panels compatible with WiFi and RF transmissions;
• One front door mounted on three polyamide hinges allowing access to the computer equipment;
• Door closed with two compression latches;
• 19 mm thick pull-out PVC shelf mounted on stainless steel triple extension rails designed for a printer or a labelling machine;
• Capable of handling several height-adjustable shelves for printers and/or labelling machines;
• Lower stainless steel shelf designed to take an optional cabinet providing an autonomous power supply (batteries, converters, chargers, etc.) on two polyethylene (PE) profiles;
• Ground contact: 4 x 100 mm diameter PE wheels with stainless steel structure and plate, including 2 pivoting braked wheels and 2 fixed wheels.

Advantages:
• Mobility and ergonomy
• Protection and guaranteed sealing
• Optimised productivity

Available in steel version: MOBICAR

MOBINOX DIMENSIONS (mm):

Outer dimensions	W 560 x D 625 x H 1 430 (support tube included)
	W 560 x D 625 x H 1040 (from floor to worktop level)
Inner dimensions	W 460 x D 540 x H 880

MOBINOX
with
Option IP 65 WATERPROOF
LCD SCREEN ENCLOSURE
and
ENERGY CABINET option
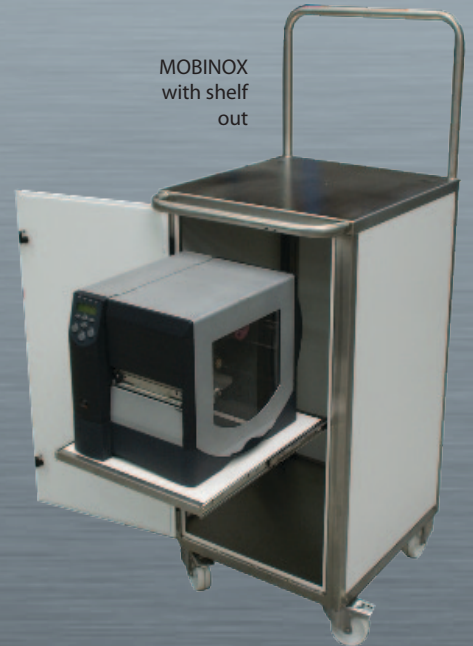
MOBINOX
with
Option IP 65 WATERPROOF
LCD SCREEN ENCLOSURE
and TAV L 24 option

MOBINOX
with shelf
out

REALISATIONS

Fixed and mobile workstations

The perfect food grade solution for protected, mobile, computer equipment

Option IP 65 WATERPROOF LCD SCREEN ENCLOSURE

• Protects flat screens against humidity, cold, splashes, etc.
• 10 mm thick composite walls;
• Smooth surface, two sealed ventilation inlets;
• Attached to the curved support tube with two omegas;
• Screen access by the handle on the cover on the
  top of the cabinet.

Option KDL

• Opening cable gland system to feed cables
  without having to remove the connectors;
• The cable gland consists of two sections which hold the cables
  in the seals;
• Generally fitted to one of the side walls, and guaranteeing a leaktight seal.

Battery lithium iron

AGM Battery

ENERGY CABINET option

Available with AGM (acid-free) and LITHIUM-IRON (Li-Fe) batteries;
• Single, perfectly insulated and ventilated housing;
• Houses batteries and all peripherals (converters, chargers, etc.);
• Provides power to multiple consumers (PC, printer, terminal, monitor, etc.) from its multi-voltage
  outputs (5 - 24 V DC and/or 230 V AC);
• Batteries certified for all types of transport: air, land and sea;
• Modular, scalable cabinet: plug-in, interchangeable converter boards depending on
  individual requirements

LABEL SLOT option

• TAV: Inspection port in unbreakable polycarbonate Available in two sizes:
    • *TAV L 12: W 220 x H 100 mm;*
    • *TAV L 24: W 220 x H 190 mm;*

Slot model TAV L 24

Additional options:

• Locks;
• Writing desk;
• Additional fixed or sliding shelf;
• Monitor mount;
• etc.

LM REALISATIONS